


ThinkTop series

300W / 305W / 310W **60 CELLS**
High Efficiency PERC Cells



PERLIGHT
smart.black

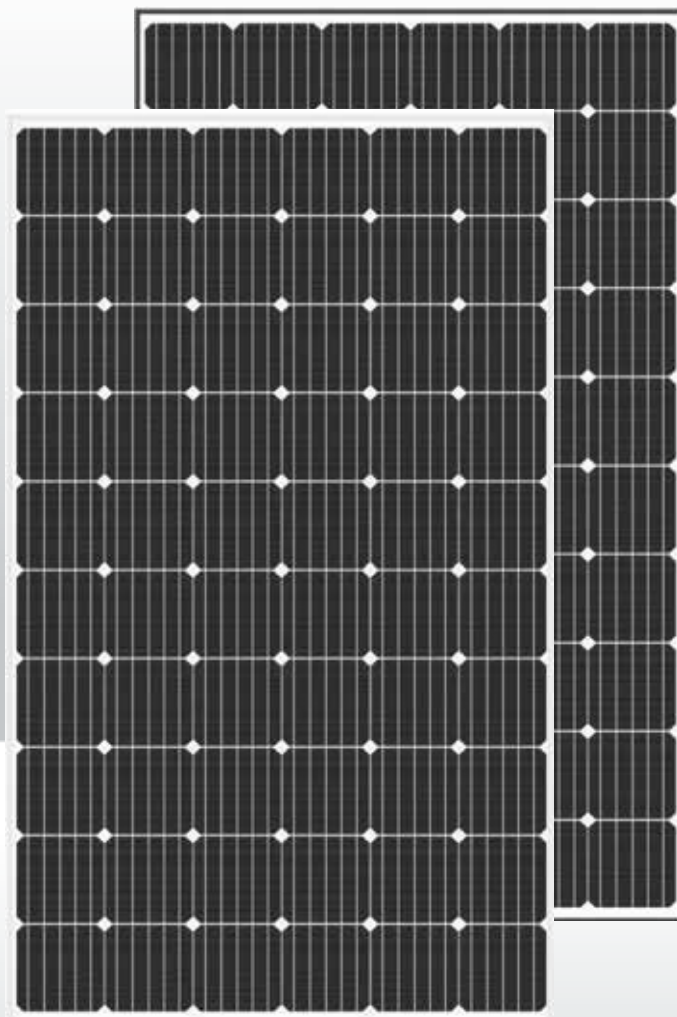

THINK TOP SERIES:PLM-300M-60 MONOCRYSTALLINE SILICON SOLAR MODULE

310W OF POWER IN A STANDARD 60 CELL CONFIGURATION
MORE POWER PER M²

20% MORE POWER THAN A CONVENTIONAL 60 CELL 250W MODULE
MODULE EFFICIENCY OF 19.06%



PRODUCT
WARRANTY




PERFORMANCE
WARRANTY (80%)



POSITIVE
TOLERANCE



MAX CELL
EFFICIENCY



MAX MODULE
EFFICIENCY



3 STEPS
EL TEST

ELECTRICAL PERFORMANCE

Module type	PLM-300M-60 Series								
Power output	P_{max}	W	290	295	300	305	310	315	320
Power output tolerances	ΔP_{max}	%	0 - 3						
Voltage at P_{max}	V_{mpp}	V	31.98	32.25	32.54	32.73	33.13	33.55	34.01
Current at P_{max}	I_{mpp}	A	9.07	9.15	9.22	9.32	9.36	9.39	9.41
Open-circuit voltage	V_{oc}	V	39.58	39.89	40.11	40.33	40.73	41.15	41.55
Short-circuit current	I_{sc}	A	9.46	9.52	9.61	9.7	9.74	9.76	9.77
Solar Module Efficiency	Eff.	%	17.83	18.14	18.45	18.75	19.06	19.37	19.67

STC:1000W/m² irradiance, 25°C cell temperature, AM 1.5g spectrum according to EN 60904-3.

THERMAL CHARACTERISTICS

Nominal operating cell temperature	NOCT	°C	45±2
Temperature coefficient of P_{max}	γ	%/°C	-0.40
Temperature coefficient of V_{oc}	β_{Voc}	%/°C	-0.30
Temperature coefficient of I_{sc}	α_{Isc}	%/°C	0.06
Temperature coefficient of V_{mpp}	β_{Vmpp}	%/°C	-0.35

OPERATING CONDITIONS

Max. system voltage	1000V _{DC}
Limiting reverse current	15A
Operating temperature range	-40°C to 85°C
Max. static load front (e.g., snow)	5400Pa
Max. static load back (e.g., wind)	2400Pa
Max. hailstone impact (diameter / velocity)	25mm / 23m/s

MECHANICAL CHARACTERISTICS

Front cover (material / thickness)	Tempered glass + ARC glass/3.2mm
Backsheet (color)	White
Cell (quantity/material/dimensions)	60/monocrystalline silicon/156 x 156mm
Frame (material / color)	anodized aluminum alloy / Black / White
Junction box (protection degree)	≥IP67

Cables & Plug connectors
 Zhejiang Chuangyuan Photovoltaic Technology Co., Ltd.
 PV-CY05L; Rated voltage=1000VDC; Rated current=30A; Ip67
 Zhejiang Jiaming Tianheyuan Photovoltaic Technology Co., Ltd.
 PV-JM601; Rated voltage=1000VDC; Rated current=16A; Ip67
 Zhejiang Zhonghuan Sunter PV Technology Co., Ltd.
 PV-ZH202; Rated voltage=1000VDC; Rated current=30A; Ip67

Module Dimensions (L / W / H) 1640mm x 992mm x 35mm


Module Weight 17.6kg

PACKING DETAILS

Container	20'GP	40'HQ
Pieces per pallet	60	66
Pallets per container	6	14
Pieces per container	360	924

Perlight Partners

Module Diagram:

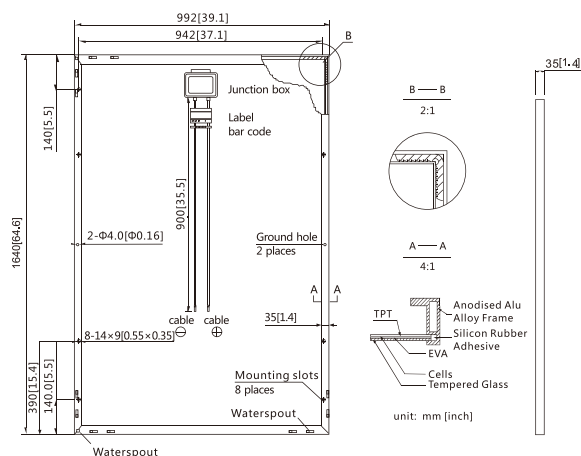

Electrical Curves:

